


LOAD CAPACITY

Beam Shoe 500/155 U

ESSVE
GET IT DONE

Type	Dim.	Partial nailing	Full nailing
U	100×200×2,0	24 anchor screws	46 anchor screws
U	140×180×2,0	24 anchor screws	46 anchor screws

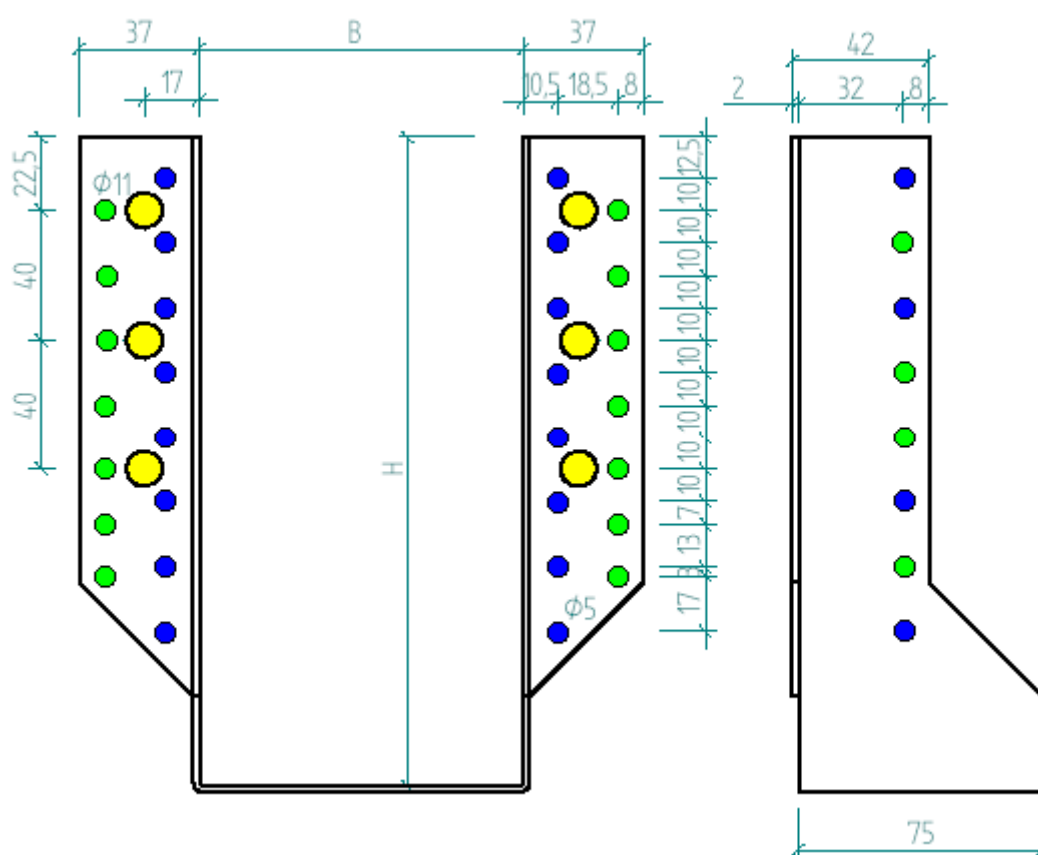

Load Capacity in C24-timber (350 kg/m³) with 5,0x40mm Anchor Screws

Load direction	24 anchor screws	46 anchor screws
F_{down}	Holes: Blue	Holes: Green + Blue
Characteristic value [kN]	24,0	30,2
Design value [kN]	11,1	13,9
Allowable value [kg]	800	1010