


LOAD CAPACITY

Beam Shoe 380/90 U and 380/90 I

ESSVE
GET IT DONE

Type	Dim.	Partial nailing	Full nailing
U PL	45×168×1,5	20 anchor screws	36 anchor screws
U PL	48×166×1,5	20 anchor screws	36 anchor screws
U	48×166×2,0	20 anchor screws	36 anchor screws
I	48×166×2,0	20 anchor screws	n/a
U PL	51×164×1,5	20 anchor screws	36 anchor screws
U	60×160×2,0	20 anchor screws	36 anchor screws
U	73×153×2,0	20 anchor screws	36 anchor screws
U	76×152×2,0	20 anchor screws	36 anchor screws
U	90×145×2,0	20 anchor screws	36 anchor screws
I	90×145×2,0	20 anchor screws	36 anchor screws
U	98×141×2,0	20 anchor screws	36 anchor screws

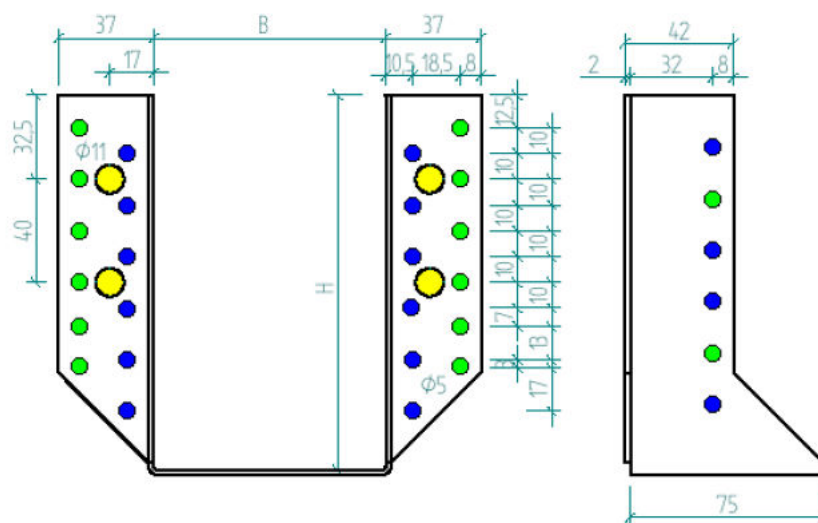

Load Capacity in C24-timber (350 kg/m³) with 5,0x40mm Anchor Screws

Load direction	20 anchor screws	36 anchor screws
F_{down}	Holes: Blue	Holes: Green + Blue
Characteristic value [kN]	20,2	22,6
Design value [kN]	9,3	10,4
Allowable value [kg]	675	755