


Skruvnycklar
Välj rätt nyckelvidd

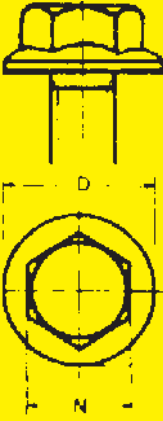

Skruvor ISO (= standard)

Metriska (SS-ISO 272)				Unified (SS-ISO 272)			Tråskruv (SS 2020) (DIN 571)	
Gänga	M 6 S sexkant- skruv	M 6 SF sexkantskruv med fläns	SB Stålbyggn.- skruv	Gänga UNC- UNF	U 6 S sexkant- skruv	SB Stålbyggn.- skruv	Gänga	T 6 S sexkant tråskruv (s.k.Fransk)
								
M 1,6	3,2							
M 1,8	3,2							
M 2	4							
M 2,2	4							
M 2,5	5							
M 3	5,5	5 7						
M 3,5	6 (5,5)							
M 4	7	7 9,5						
M 4,5	7							
M 5	8	7 8 11						
M 6	10	8 10 10 13,8					M 6	10
M 7	11			¼	7/16 11,11			
M 8	13	10 12 17,7		5/16	½ 12,7		M 8	13
M 10	16 (17)	13 14 21,6		3/8	9/16 14,29		M 10	16 (17)
M 12	18 (19)	15 26,6	18 (19)	½	¾ 19,05	¾ 19,05	M 12	18 (19)
M 14	21 (22)	18 19 30						
M 16	24	21	24	5/8	15/16 23,81	15/16 23,81	M 16	24
M 18	27							
M 20	30	27	30	¾	1 1/8 28,58	1 1/8 28,58	M 20	30
M 22	34 (32)		34 (32)	7/8	1 5/16 33,34	1 5/16 33,34		
M 24	36		36	1	1 ½ 38,1	1 ½ 38,1		
M 27	41							
M 30	46			1 ¼	1 7/8 47,63			
M 33	50							
M 36	55							
M 39	60			1 ½	2 ¼ 57,15			
M 42	65							
M 45	70							
M 48	75			1 ¾	2 5/8 66,68			
M 52	80			2	3 76,2			
M 56	85							
M 60	90							
M 64	95							
M 68	100							
M 72	105							
M 76	110							
M 80	115							
M 85	120							
M 90	130							
M 95	135							
M 100	145							
M 105	150							
M 110	155				Uppgifter inom parentes avser äldre standard (1985). Skruvar med flera måttuppgifter för nyckelvidd = avviker mellan olika fabrikat.			
M 115	165							
M 120	170							
M 125	180							