



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

T-ROOF EPIC

TECCA AB



EPD HUB, HUB-0239

Publishing date 13 January 2023, last updated date 13 January 2023, valid until 13 January 2028

Created with One Click LCA



GENERAL INFORMATION

MANUFACTURER

Manufacturer	TECCA AB
Address	Nydalavägen 14, 574 35 Vetlanda, Sweden
Contact details	marilynlindeh@teccaworld.com
Website	www.teccaworld.com

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Construction product
Category of EPD	Sister EPD
Scope of the EPD	Cradle to gate with options, A4-A5, and modules C1-C4, D
EPD author	Miia Kuhlman, Katepal Oy
EPD verification	Independent verification of this EPD and data, according to ISO 14025: ☐ Internal certification ☒ External verification
EPD verifier	E.A as an authorized verifier acting for EPD Hub Limited

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

PRODUCT

Product name	T-Roof Epic
Additional labels	-
Product reference	-
Place of production	Lempäälä, Finland
Period for data	2021
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	%

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 m ² of installed T-Roof Epic roof
Declared unit mass	1.98 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	2.1
GWP-total, A1-A3 (kgCO ₂ e)	1.96
Secondary material, inputs (%)	0.394
Secondary material, outputs (%)	100.0
Total energy use, A1-A3 (kWh)	19.1
Total water use, A1-A3 (m ³ e)	0.0129

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

TECCA AB is a Nordic market leader developing premium solutions for building material retailers and prefabricated housing industry with focus on climate shell and protective products. Product solutions are developed from the perspective of high standards within extensive quality assurance and testing processes. The total offer also contains customized supply chain and logistics solutions. TECCA AB is owned by Volati – a Swedish industrial group formed in 2003. Product-related or management system-related certifications: TECCA AB maintains ISO 9001 and 14001 certificates. For additional information about TECCA, please visit the company web site at www.teccaworld.com/

PRODUCT DESCRIPTION

T-Roof Epic is a fabric covered bitumen membrane for roof waterproofing. It is used as an underlay sheet for tile- and metal sheet roofs. Bitumen waterproofing membranes provide a good and durable protection against water penetration. T-Roof Epic is installed to the roof by mechanical fasteners from the joint with 10 cm overlapping of the product. Membranes are bonded together with adhesive edges. The product is made of SBS-modified bitumen and reinforced with a polyester nonwoven. Upper surface of the product is covered with polyester fabric and bottom surface of the product is covered with polypropylene fabric. The product has self-adhesive edges.

Further information can be found at www.teccaworld.com/

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	-	
Minerals	5-20	EU
Fossil materials	80-95	EU
Bio-based materials	-	

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.035

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 m ² of installed T-Roof Epic roof
Mass per declared unit	1.98 kg
Functional unit	-
Reference service life	-

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1% (1000 ppm).


PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
x	x	x	x	x	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	x	
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recycling

Modules not declared = MND. Modules not relevant = MNR.

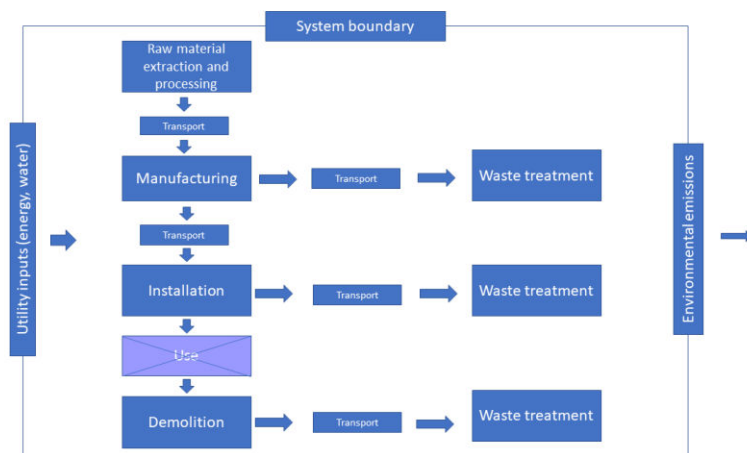

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

The bitumen is generally delivered as hot from the petroleum refinery to the manufacturing site, where it's heated further for the processing. The manufacturing is done by heating the raw materials (bitumen and copolymers) to a specific temperature and mixing them. The polyester nonwoven acting as a reinforcing structure is impregnated and coated with this bitumen mix. The resulting sheet is then faced with polypropylene fabrics and protective films on the adhesive edges. After cooling the product is cut to the right length, rolled, and placed on a wooden pallet. The pallet is wrapped with PE-film for storage and transportation.

TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

Freight mode and distances for transportation from production site to the construction site has been approached by most probable scenario based on the annual sales volume of the product. The most probable scenario for transportation distance is 480 km with lorry and 300 km with ferry. Vehicle capacity utilization volume factor is assumed to be 1 which means full load. In reality, it may vary but as role of transportation emissions in total results is small, the variety in load is assumed to be negligible. Empty returns are not taken into account as it is assumed that return trip is used by the

transportation company to serve the needs of other clients. Transportation does not cause losses as product are packaged properly. Also, volume capacity utilization factor is assumed to be 1 for the nested packaged products. Installation of the product is done by mechanical fasteners, the amount of mechanical fasteners needed is included in the calculation. The installation loss is assumed to be low, 1,5%.

PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD does not cover the use phase.

Air, soil, and water impacts during the use phase have not been studied.


PRODUCT END OF LIFE (C1-C4, D)

At the end-of-life, in the demolition phase 100% of the waste is assumed to be collected as separate construction waste. The consumption of energy and natural resources is negligible for disassembling of the end-of-life product, as demolition of bitumen membrane roofing is assumed to be done either manually or with a powered cutter. Thus, the impacts of demolition are assumed zero (C1).

The bitumen roofing is delivered to the nearest construction waste treatment plant. It is estimated that there is no mass loss during the use of the product, therefore, the end-of-life product is assumed to have the same weight as the declared product. All the end-of-life product is assumed to be sent to the closest facility for waste treatment. Transportation distance to the closest disposal area is estimated as 50 km and the transportation method is lorry which is the most common (C2). The End-of-life scenario for 100% of the product in this study is incineration. Heat recovered from the combustion of bitumen roofing replaces the use of fossil fuels in energy production (D). The energy generated by burning bitumen roofing replaces fossil fuel, which is assumed to be oil. The calculation assumes that the waste incineration plant has co-generation of electricity and heat.

MANUFACTURING PROCESS

PRODUCTION DIAGRAM

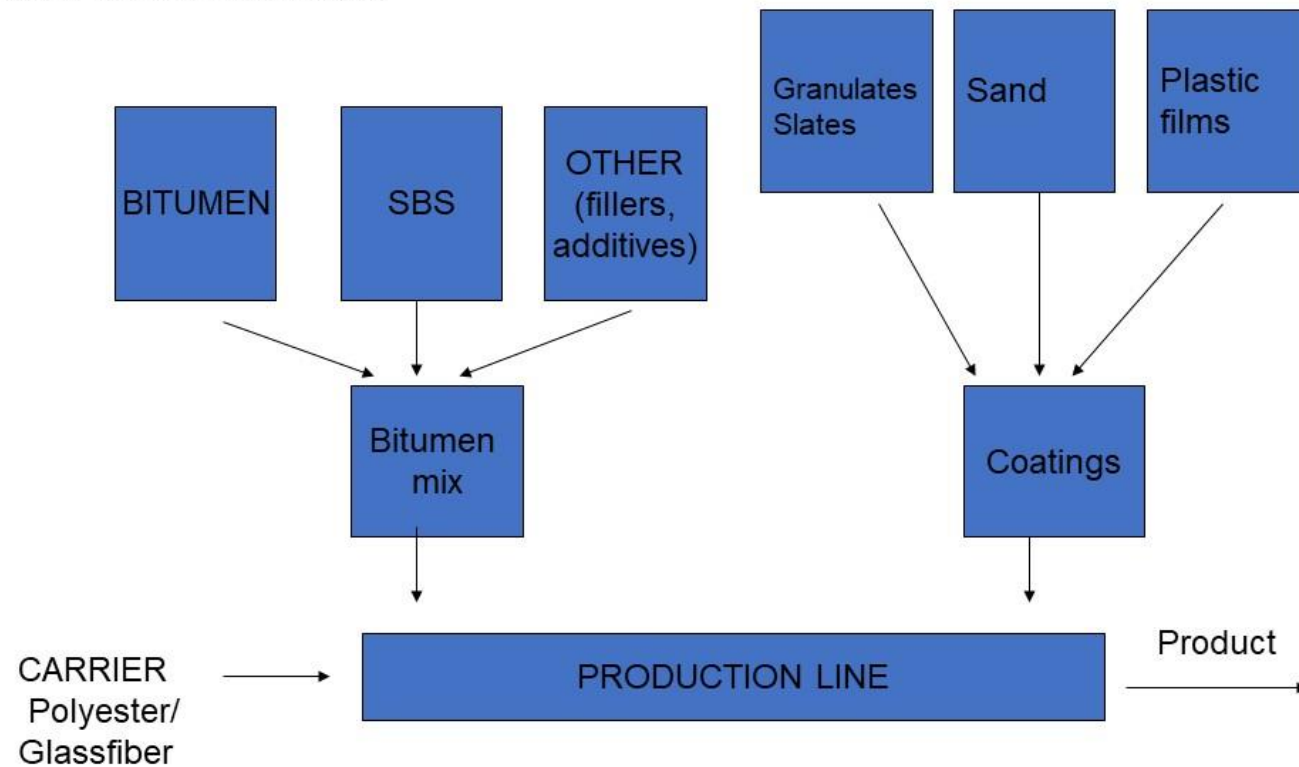

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Not applicable
Manufacturing energy and waste	Allocated by mass or volume

AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	%

This EPD is product and factory specific and does not contain average calculations.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent and One Click LCA databases were used as sources of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	1,65E0	1,7E-1	1,5E-1	1,96	2,33E-1	2,19E-1	MND	MND	MND	MND	MND	MND	MND	0E0	2,13E-2	7,28E-1	0E0	3,21E0
GWP – fossil	kg CO ₂ e	1,65E0	1,7E-1	2,82E-1	2,1	2,35E-1	7,48E-2	MND	MND	MND	MND	MND	MND	MND	0E0	2,13E-2	7,31E-1	0E0	3,06E0
GWP – biogenic	kg CO ₂ e	-2,47E-3	8,51E-5	-1,33E-1	-1,35E-1	7,34E-5	1,44E-1	MND	MND	MND	MND	MND	MND	MND	0E0	1,05E-5	-3,05E-3	0E0	1,42E-1
GWP – LULUC	kg CO ₂ e	8,09E-4	6,29E-5	8,08E-4	1,68E-3	1,01E-4	6,73E-5	MND	MND	MND	MND	MND	MND	MND	0E0	9,25E-6	4,24E-4	0E0	2,21E-4
Ozone depletion pot.	kg CFC ₁₁ e	7,26E-7	3,84E-8	1,3E-8	7,78E-7	5,16E-8	1,59E-8	MND	MND	MND	MND	MND	MND	MND	0E0	4,7E-9	5,32E-8	0E0	-3,22E-7
Acidification potential	mol H ⁺ e	1E-2	1,03E-3	4,32E-4	1,15E-2	2,93E-3	3,61E-4	MND	MND	MND	MND	MND	MND	MND	0E0	8,54E-5	2,1E-3	0E0	-1,31E-2
EP-freshwater ²⁾	kg Pe	3,9E-5	1,37E-6	4,5E-6	4,49E-5	1,68E-6	3,13E-6	MND	MND	MND	MND	MND	MND	MND	0E0	2,06E-7	1,22E-5	0E0	-2,09E-6
EP-marine	kg Ne	1,52E-3	2,85E-4	1E-4	1,91E-3	7,62E-4	7,32E-5	MND	MND	MND	MND	MND	MND	MND	0E0	2,45E-5	5,8E-4	0E0	-9,81E-4
EP-terrestrial	mol Ne	1,68E-2	3,15E-3	1,08E-3	2,1E-2	8,46E-3	7,44E-4	MND	MND	MND	MND	MND	MND	MND	0E0	2,71E-4	6,34E-3	0E0	-9,3E-3
POCP (“smog”) ³⁾	kg NMVOCe	6,82E-3	9,23E-4	3,79E-4	8,12E-3	2,29E-3	2,59E-4	MND	MND	MND	MND	MND	MND	MND	0E0	8,31E-5	2,05E-3	0E0	-3,41E-3
ADP-minerals & metals ⁴⁾	kg Sbe	3,81E-5	4,11E-6	1,38E-6	4,36E-5	4,96E-6	1,87E-6	MND	MND	MND	MND	MND	MND	MND	0E0	7,64E-7	8,97E-6	0E0	1,95E-6
ADP-fossil resources	MJ	7,17E1	2,54E0	1,81E0	7,6E1	3,39E0	1,73E0	MND	MND	MND	MND	MND	MND	MND	0E0	3,17E-1	7,18E0	0E0	-2,06E1
Water use ⁵⁾	m ³ e depr.	6,42E-1	8,21E-3	3,2E-2	6,82E-1	9,75E-3	2,18E-2	MND	MND	MND	MND	MND	MND	MND	0E0	1,13E-3	1,54E-1	0E0	-2,27E-1

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	7,11E-8	1,19E-8	5,49E-6	5,57E-6	1,37E-8	3,77E-9	MND	MND	MND	MND	MND	MND	MND	0E0	1,3E-9	3,62E-8	0E0	-1,25E-7
Ionizing radiation ⁶⁾	kBq U235e	2,09E-1	1,11E-2	3,02E-3	2,23E-1	1,47E-2	6,48E-3	MND	MND	MND	MND	MND	MND	MND	0E0	1,39E-3	2,16E-2	0E0	-8,91E-2
Ecotoxicity (freshwater)	CTUe	3,71E1	1,94E0	1,98E0	4,1E1	2,47E0	1,69E0	MND	MND	MND	MND	MND	MND	MND	0E0	2,59E-1	7,57E0	0E0	-9,03E0
Human toxicity, cancer	CTUh	5,74E-10	5,92E-11	9,62E-11	7,3E-10	9,22E-11	1,21E-10	MND	MND	MND	MND	MND	MND	MND	0E0	8,29E-12	7,71E-10	0E0	-5,43E-10
Human tox. non-cancer	CTUh	1,54E-8	2,18E-9	1,3E-9	1,89E-8	2,62E-9	1,72E-9	MND	MND	MND	MND	MND	MND	MND	0E0	2,82E-10	1,08E-8	0E0	-1,2E-9
SQP ⁷⁾	-	1,56E0	2,25E0	2,37E-1	4,05E0	2,11E0	2,5E-1	MND	MND	MND	MND	MND	MND	MND	0E0	2,18E-1	4,36E0	0E0	3,56E-1

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	7,96E-1	3,42E-2	1,04E0	1,87E0	4,09E-2	9,57E-2	MND	MND	MND	MND	MND	MND	MND	0E0	5,39E-3	3,54E-1	0E0	-2,21E-1
Renew. PER as material	MJ	7,37E-2	0E0	1,36E0	1,43E0	0E0	2,16E-2	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	-1,85E-1
Total use of renew. PER	MJ	8,69E-1	3,42E-2	2,4E0	3,3E0	4,09E-2	1,17E-1	MND	MND	MND	MND	MND	MND	MND	0E0	5,39E-3	3,54E-1	0E0	-4,05E-1
Non-re. PER as energy	MJ	6,25E1	2,54E0	1,73E0	6,68E1	3,39E0	1,61E0	MND	MND	MND	MND	MND	MND	MND	0E0	3,17E-1	7,18E0	0E0	-2,06E1
Non-re. PER as material	MJ	9,14E0	0E0	8,13E-2	9,22E0	0E0	1,25E-1	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	-7,47E-2
Total use of non-re. PER	MJ	7,17E1	2,54E0	1,81E0	7,6E1	3,39E0	1,73E0	MND	MND	MND	MND	MND	MND	MND	0E0	3,17E-1	7,18E0	0E0	-2,06E1
Secondary materials	kg	7,63E-3	0E0	1,67E-4	7,8E-3	0E0	2,93E-3	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	1,92E-2
Renew. secondary fuels	MJ	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Non-ren. secondary fuels	MJ	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Use of net fresh water	m³	1,18E-2	4,37E-4	6,51E-4	0,0129	5,08E-4	7,15E-4	MND	MND	MND	MND	MND	MND	MND	0E0	5,51E-5	2,15E-3	0E0	4,23E-4

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	8,08E-2	2,59E-3	7,74E-3	9,12E-2	3,5E-3	6,89E-3	MND	MND	MND	MND	MND	MND	MND	0E0	3,73E-4	0E0	0E0	7,28E-2
Non-hazardous waste	kg	1,32E0	1,83E-1	1,9E-1	1,7E0	1,87E-1	1,4E-1	MND	MND	MND	MND	MND	MND	MND	0E0	2,07E-2	0E0	0E0	1,86E0
Radioactive waste	kg	3,27E-4	1,74E-5	3,06E-6	3,48E-4	2,34E-5	8,05E-6	MND	MND	MND	MND	MND	MND	MND	0E0	2,15E-6	0E0	0E0	-1,48E-4

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Materials for recycling	kg	0E0	0E0	8,6E-3	8,6E-3	0E0	1,1E-1	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Materials for energy rec	kg	0E0	0E0	8,1E-2	8,1E-2	0E0	1,15E-1	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	1,98E0	0E0	0E0
Exported energy	MJ	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	1,55E0	1,68E-1	2,79E-1	2E0	2,33E-1	7,84E-2	MND	MND	MND	MND	MND	MND	MND	0E0	2,11E-2	7,15E-1	0E0	3,08E0
Ozone depletion Pot.	kg CFC ₁₁ e	5,82E-7	3,05E-8	1,08E-8	6,23E-7	4,1E-8	1,32E-8	MND	MND	MND	MND	MND	MND	MND	0E0	3,75E-9	4,42E-8	0E0	-2,43E-7
Acidification	kg SO ₂ e	8,44E-3	6,21E-4	3,42E-4	9,4E-3	2,13E-3	2,89E-4	MND	MND	MND	MND	MND	MND	MND	0E0	4,4E-5	1,32E-3	0E0	-1,16E-2
Eutrophication	kg PO ₄ ³ e	1,76E-3	9,84E-5	1,31E-4	1,99E-3	2,7E-4	1,56E-4	MND	MND	MND	MND	MND	MND	MND	0E0	9,66E-6	1,52E-3	0E0	-1,89E-4
POCP ("smog")	kg C ₂ H ₄ e	4,74E-4	2,87E-5	2,39E-5	5,27E-4	6,8E-5	2,11E-5	MND	MND	MND	MND	MND	MND	MND	0E0	2,87E-6	1,25E-4	0E0	-4,57E-4
ADP-elements	kg Sbe	3,81E-5	4,11E-6	1,38E-6	4,36E-5	4,96E-6	1,87E-6	MND	MND	MND	MND	MND	MND	MND	0E0	7,64E-7	8,97E-6	0E0	1,95E-6
ADP-fossil	MJ	7,17E1	2,54E0	1,81E0	7,6E1	3,39E0	1,73E0	MND	MND	MND	MND	MND	MND	MND	0E0	3,17E-1	7,18E0	0E0	-2,06E1

VERIFICATION STATEMENT

VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliancy with reference standard, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? Read more online.

This EPD has been generated by One Click LCA EPD generator, which has been verified and approved by the EPD Hub.

THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as present with respect to the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

Elma Avdyli as an authorized verifier acting for EPD Hub Limited
13.01.2023

