LOAD CAPACITY
Beam Shoe 550/155 U

Type	Dim.	Partial nailing	Full nailing
U	90×230×2,0	28 anchor screws	52 anchor screws

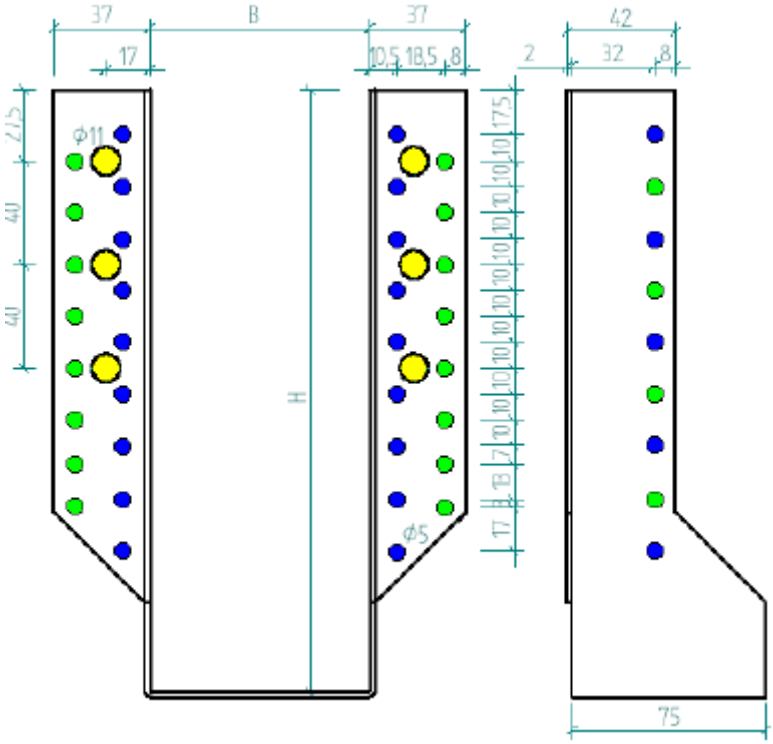

Load Capacity in C24-timber (350 kg/m^3) with 5,0x40mm Anchor Screws

Load direction F_{down}	28 anchor screws Holes: Blue	52 anchor screws Holes: Green + Blue
Characteristic value [kN]	27,7	33,9
Design value [kN]	12,8	15,7
Allowable value [kg]	930	1135

vxl +46 8 623 61 00 | info@essve.se | essve.com